

# RECESSED REMODEL HOUSING Series

**4"/6"**

Remodel Construction Shallow Housing

Project Name:

Order Number:

Prepare by:

Note:

Date:



Type:

The **L608-SH-RM/L408-SH-RM** IC type remodel shallow can housings is designed for both ceiling joists installations and drop ceiling (with T-bar grid) installations. It can be completely covered by thermal insulation. Also, the fixture may direct contact with any combustible material like ceiling joist or floor board safely.

The 608-SH-RM/408-SH-RM is a Title 24 compliant, no screw based socket or other medium-based incandescent socket adapters are needed.

**L608-SH-RM****L408-SH-RM****RoHS**  
COMPLIANT**WET**  
LOCATIONS

## DIMENSION

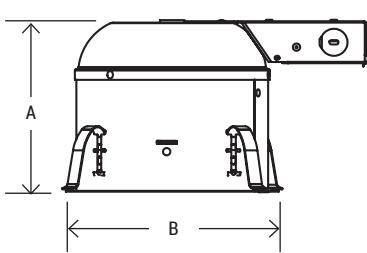

MODEL#	L608-SH-RM	L408-SH-RM
<b>A</b>	5.5"	4.62"
<b>B</b>	6.75"	4.75"
<b>C</b>	9.75"	7.75"

## CONSTRUCTION

- Metal housing and frame
- Extendable hanger bar
- Foam gasket included
- Pre-installed nails for easier installs in lumber and woods
- Title 24 compliant

## JUNCTION BOX

- Quick wiring connectors included for easier wiring, no wiring nuts and electrical tap needed
- Eight conduit knockouts for convenient wiring

## MOUNTING

- Unit is for remodel construction fixture, designed to be installed in applications where the ceiling joists are exposed
- Unit can be installed onto a drop ceiling with T-bar grid in place
- Can be completely covered by thermal insulation
- May direct contact with any combustible material like ceiling joist or floor board

## LISTING

- ETL certified
- Air-Tite certified per ASTM-E283
- Suitable for damp locations
- Certified to California JA8
- Can be used to comply with Title 24 Part 6 requirements

## WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.