

LSSM Series

5"/7"/9"


Square Surface Mount Downlight with 5CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

SQUARE SURFACE MOUNT

The **LSSM Series** LED Square Slim Surface Downlight comes with integrated design perfect and all mounting hardware for quick and easy installation is included. Available in 4 different size apertures. LED surface mounted luminaire with the appearance of a recessed downlight. This downlight is compatible with most LED dimmers, letting you smoothly dim from 10% to 100% without it flickering.


Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.

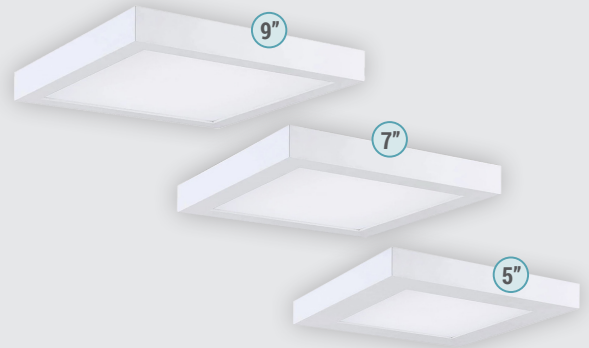

Select color temperature from

- 2700K **WARM WHITE**
- 3000K **SOFT WHITE**
- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**

DIMENSION

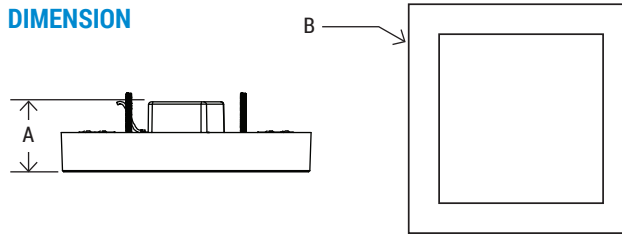

MODEL#	MRS510	MRS713	MRS918
A	2.36"	2.36"	2.36"
B	5.51"	7.48"	9.06"

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

TECHNICAL SUMMARY

MODEL #	FINISH	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
LSSM510-5CCT	WH (White)	580	10W	55 lm/W	90	120V, 60 Hz	95°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F
LSSM713-5CCT	BN (Brush Nickel)	750	13W	56 lm/W							
LSSM918-5CCT	BZ (Bronze)	1050	18W	57 lm/W							

PART NUMBER ORDERING SUMMARY

L S S M 7 13 - 5CCT - WH

LSQ	S Square	SM Surface Mount	5"/7"/9" Aperture	10W/13W/18W Wattage	5CCT 27K/30K/35K/40K/50K	WH/BN/BZ White/Brush Nickel/Bronze
-----	-------------	---------------------	----------------------	------------------------	-----------------------------	---------------------------------------

LSSM Series



5"/7"/9"

Square Surface Mount Downlight with 5CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

Unit includes die-cast metal housing, LED array, heat sink, lens, and metal trim with white, brush nickel and bronze finish.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Surface mount on junction box.
- Surface mounting bracket included.

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.

FINISH COLOR



WH
White



BN
Brush Nickel



BZ
Bronze

RECOMMENDED DIMMERS

LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH


LEVITON

- R00-RNL06-TW
- R50-IPL06-10M


ACCESSORIES (INCLUDED)



WIRE NUTS



SCREW A



SCREW B