

## COMBO COB/SMD LED EXIT EMERGENCY LIGHT


Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

This **Combo cob/smd LED exit emergency light** combines a exit sign with a optional red or green letter and dual heads that can rotate 180 degree. It combines quality and reliability with intelligent, because it is made from flame-retardant, impact-resistant thermoplastic and suitable for use in humid environment. It is UL listed and can be used for up to 90 minutes after being 24 hours fully charged.



### DIMENSION

Length	20.28"
Width	3.94"
Height	1.59"

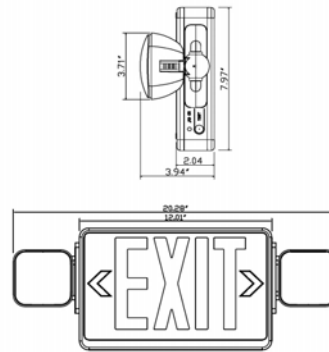

### TECHNICAL SUMMARY

MODEL #	NAME	VOLTAGE	COLOR	BATTERY	RECHARGE TIME	EMERGENCY OPERATION	LED CHIPS	WATTAGE	LUMEN	CRI
LJ-2	Red Combo Exit Sign	120/277V	Red/5000k	build-in 9.6V	≤24hrs	≥90mins	12	3W	150LM	80
LJ-2G	Green Combo Exit Sign		Green/5000k							
LJ-2RG	Red/Green Combo Exit Sign		RED/Green/5000k							

### ELECTRICAL

- Dual 120/277V voltage. Optional multi-tap voltage available.
- Built-in 9.6V 700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.

### MOUNTING

- Innovative, easy installation in minutes.
- Universal J-box mounting pattern.

- Single or double face (Universal).
- Optional RED or GREEN letters.

### HOUSING

- Injection-molded, engineering grade. 5VA flame retardant.
- High-impact resistant, thermoplastic in white or black finish.

### WARRANTY/LISTING

- Two years warranty on all electronics and housing. Two years warranty for battery meets UL 924.
- cUL and UL listed for damp location (0°C-50°C).