

LR Series

USA+Type C Receptacle

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

DESCRIPTION




LR-UC-4.8A

This receptacle offers two USB charging ports and duplex Tamper-Resistant Receptacle. It is able to charge any current electronic devices simultaneously, including smart phones, tablets, e-readers, cameras and MP3 players. What's more, it has the capability to charge new device required higher current rating in the future. All you will need is a USB cable to connect to one of the two USB ports.



DIMENSIONS

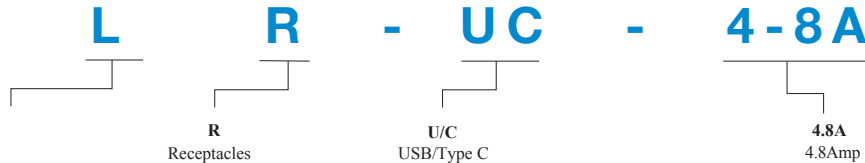

TECHNICAL SUMMARY

- 2USB ports with a super high-current power of 4.8Amp, 5VDC
- Charge most compatible electrical device directly without an adapter.
- Tamper-Resistant Shutters provide compliance with 2011 NEC Code.
- Replace a standard duplex receptable.
- Back and side wire for easy installation.
- UL listed.

Receptacle Rating.....	15Amp, 125VAC
USB Rating.....	Two USB ports with total 4.8Amp, 5VDC
Wire Terminals.....	#12-#14AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
USB Compatibility..	USB 1.1/2.0/3.0 devices, including Apple products
Strip Length.....	0.5inch(back wire holes). 1inch(screw terminal)