

# LHSL+RGB Series


## Hardscape Light RGB+ 27/30/40K

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

The LHSL Series features a die-cast aluminum housing with an epoxy powder-coated bronze (ORB) finish, a stainless steel mounting bracket, and an optional frosted lens. It is equipped with RGBW (2700K, 3000K, 4000K + RGB) lighting and allows for color temperature selection via a key switch. Designed for efficient installation and energy savings, this series operates on 12-24V AC/DC with a power range of 5W/7W. It utilizes SMD2835 LED technology, offers a Color Rendering Index (CRI) of >90Ra, and delivers luminous outputs of 200LM/280LM with a 120° beam angle. The LHSL Series has a lifespan of 50,000 hours and functions within a temperature range of -4°F to 104°F. Constructed with an aluminum body, a polycarbonate (PC) lens, and a copper cable.



### DIMENSION

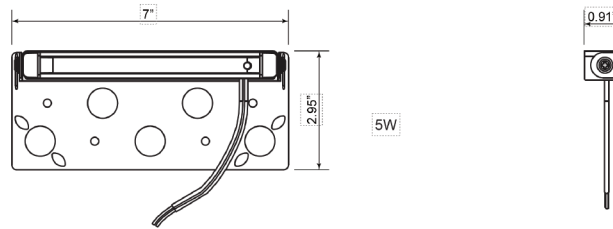

### TECHNICAL SUMMARY

MODEL NO.	WATTS	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
LHSL7-5W-RGBW	5W	200LM	RGBW(27/30/40K)	12-24V	N/A	N/A	ETL
LHSL14-7W-RGBW	7W	280LM	RGBW(27/30/40K)	12-24V	N/A	N/A	ETL

### PART NUMBER ORDERING SUMMARY

# LHSL7-5W-RGBW

7" Hardscape Light

5W  
Wattage

RGBW(27/30/40K)  
Selectable CCT

# LHSL+RGB Series

## Hardscape Light RGB+ 27/30/40K

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

### CONSTRUCTION

- Unit includes heavy duty metal frame, LED array, heat sink, hanger, security cable and high quality LED tube.

### MOUNTING

- Above Ceiling
- Ceiling Joists & drop ceiling installations

### WARRANTY

- 5 years manufacturer warranty, consult for more details.  
\* Terms and conditions may apply.

### HIGHLIGHT



#### Temperature Range

Functions in temperatures from -4°F to 104°F

#### Durable Construction

Die-cast aluminium housing with epoxy powder-coated bronze (COB) finish and stainless steel mounting bracket